


GENERAL NOTES:

1. A WET POND IS A STORMWATER MANAGEMENT SYSTEM WITH A PERMANENT POOL THAT STORES AND TREATS STORMWATER.
2. CLEAR CRUSH DRAIN ROCK (IE. AASHTO NO. 57 STONE) TO BE USED WITHIN THE UNIT HOLLOW CORES AND BEHIND THE RETAINING WALL UP TO 1' (0.3M) ABOVE HIGH WATER LEVEL TO ENSURE PROPER DRAINAGE.
3. CLEAR CRUSH DRAIN ROCK TO BE WRAPPED IN FILTER SEPARATION FABRIC TO AVOID INTRUSION OF SOIL INTO THE STONE VOID MATRIX.
4. PERFORATED DRAIN PIPES MAY BE ADDED AS REQUIRED.
5. ADDITIONAL SCOUR ANALYSES AND RIP-RAP SIZING CALCULATIONS SHOULD BE COMPLETED SEPARATELY. THESE CALCULATIONS WILL DETERMINE EMBEDMENT DEPTH BELOW THE SCOUR RANGE.
6. SEE OTHER DETAILS FOR GEOGRID REINFORCED MSE RETAINING WALL OPTION FOR THE WET POND (STORMWATER RETENTION) SCENARIO.

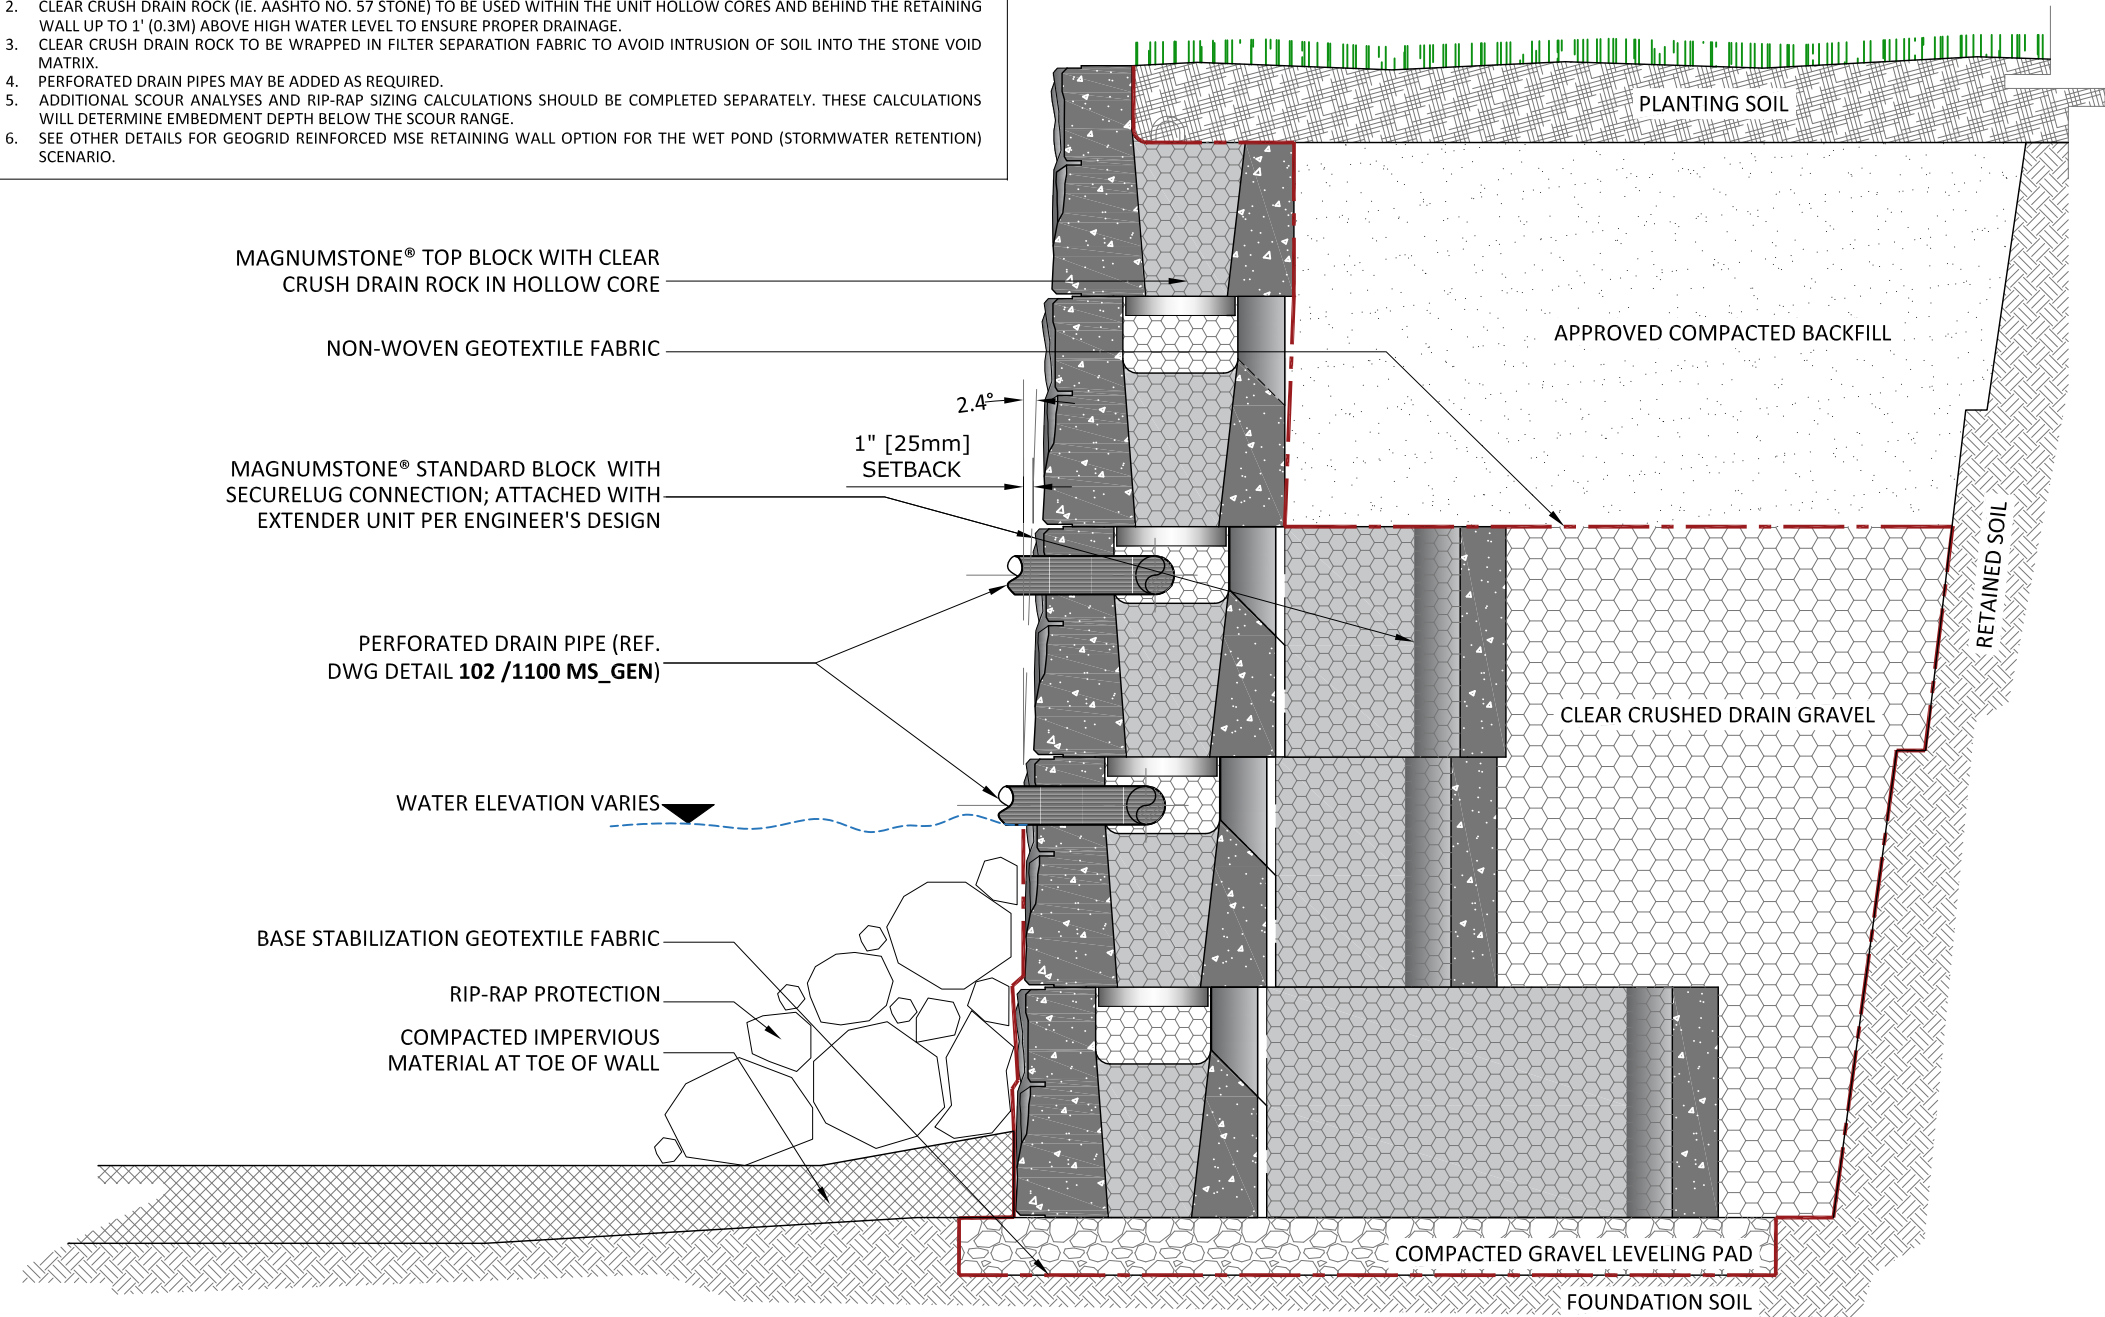

01

GRAVITY-RETENTION WET POND DETAILS

SCALE 1 : 20

GENERAL NOTES:

These drawings are intended solely to act as an aid when designing a wall. This drawing should not be used for final design or construction.

Each site-specific wall should be certified and signed by a registered geotechnical engineer in the State or Province that it is being built.

The accuracy and use of the details in this document are the sole responsibility of the user.

01	ADDENDUM INFORMATION	08-10-2023
00	INTERNAL APPROVAL	07-01-2023
Rev	DESCRIPTION	DATE

REMARKS:

PURPOSE OF ISSUE:

- ☐ INFORMATION
☐ REVIEW / APPROVAL
☐ PRODUCTION

SHEET CONTENT

MAGNUMSTONE
GRAVITY WALL
STORMWATER APPLICATIONS

RETENTION WET POND
CROSS SECTION DETAILS

SHEET REFERENCE

101

1113-MS-STM

DRAWING INFORMATION

SCALE : AS INDICATED
PAPER SIZE: 17" WD X 11" HT
PREPARED BY: RM




MagnumStone
RETAINING WALLS

www.MAGNUMSTONE.com | 1 (800) 939-9193

GENERAL NOTES:

1. A WET POND IS A STORMWATER MANAGEMENT SYSTEM WITH A PERMANENT POOL THAT STORES AND TREATS STORMWATER.
2. CLEAR CRUSH DRAIN ROCK (IE. AASHTO NO. 57 STONE) TO BE USED WITHIN THE UNIT HOLLOW CORES AND BEHIND THE RETAINING WALL UP TO 1' (0.3M) ABOVE HIGH WATER LEVEL TO ENSURE PROPER DRAINAGE.
3. CLEAR CRUSH DRAIN ROCK TO BE WRAPPED IN FILTER SEPARATION FABRIC TO AVOID INTRUSION OF SOIL INTO THE STONE VOID MATRIX.
4. PERFORATED DRAIN PIPES MAY BE ADDED AS REQUIRED.
5. ADDITIONAL SCOUR ANALYSES AND RIP-RAP SIZING CALCULATIONS SHOULD BE COMPLETED SEPARATELY. THESE CALCULATIONS WILL DETERMINE EMBEDMENT DEPTH BELOW THE SCOUR RANGE.
6. SEE OTHER DETAILS FOR GRAVITY RETAINING WALL OPTION FOR THE WET POND (STORMWATER RETENTION) SCENARIO.

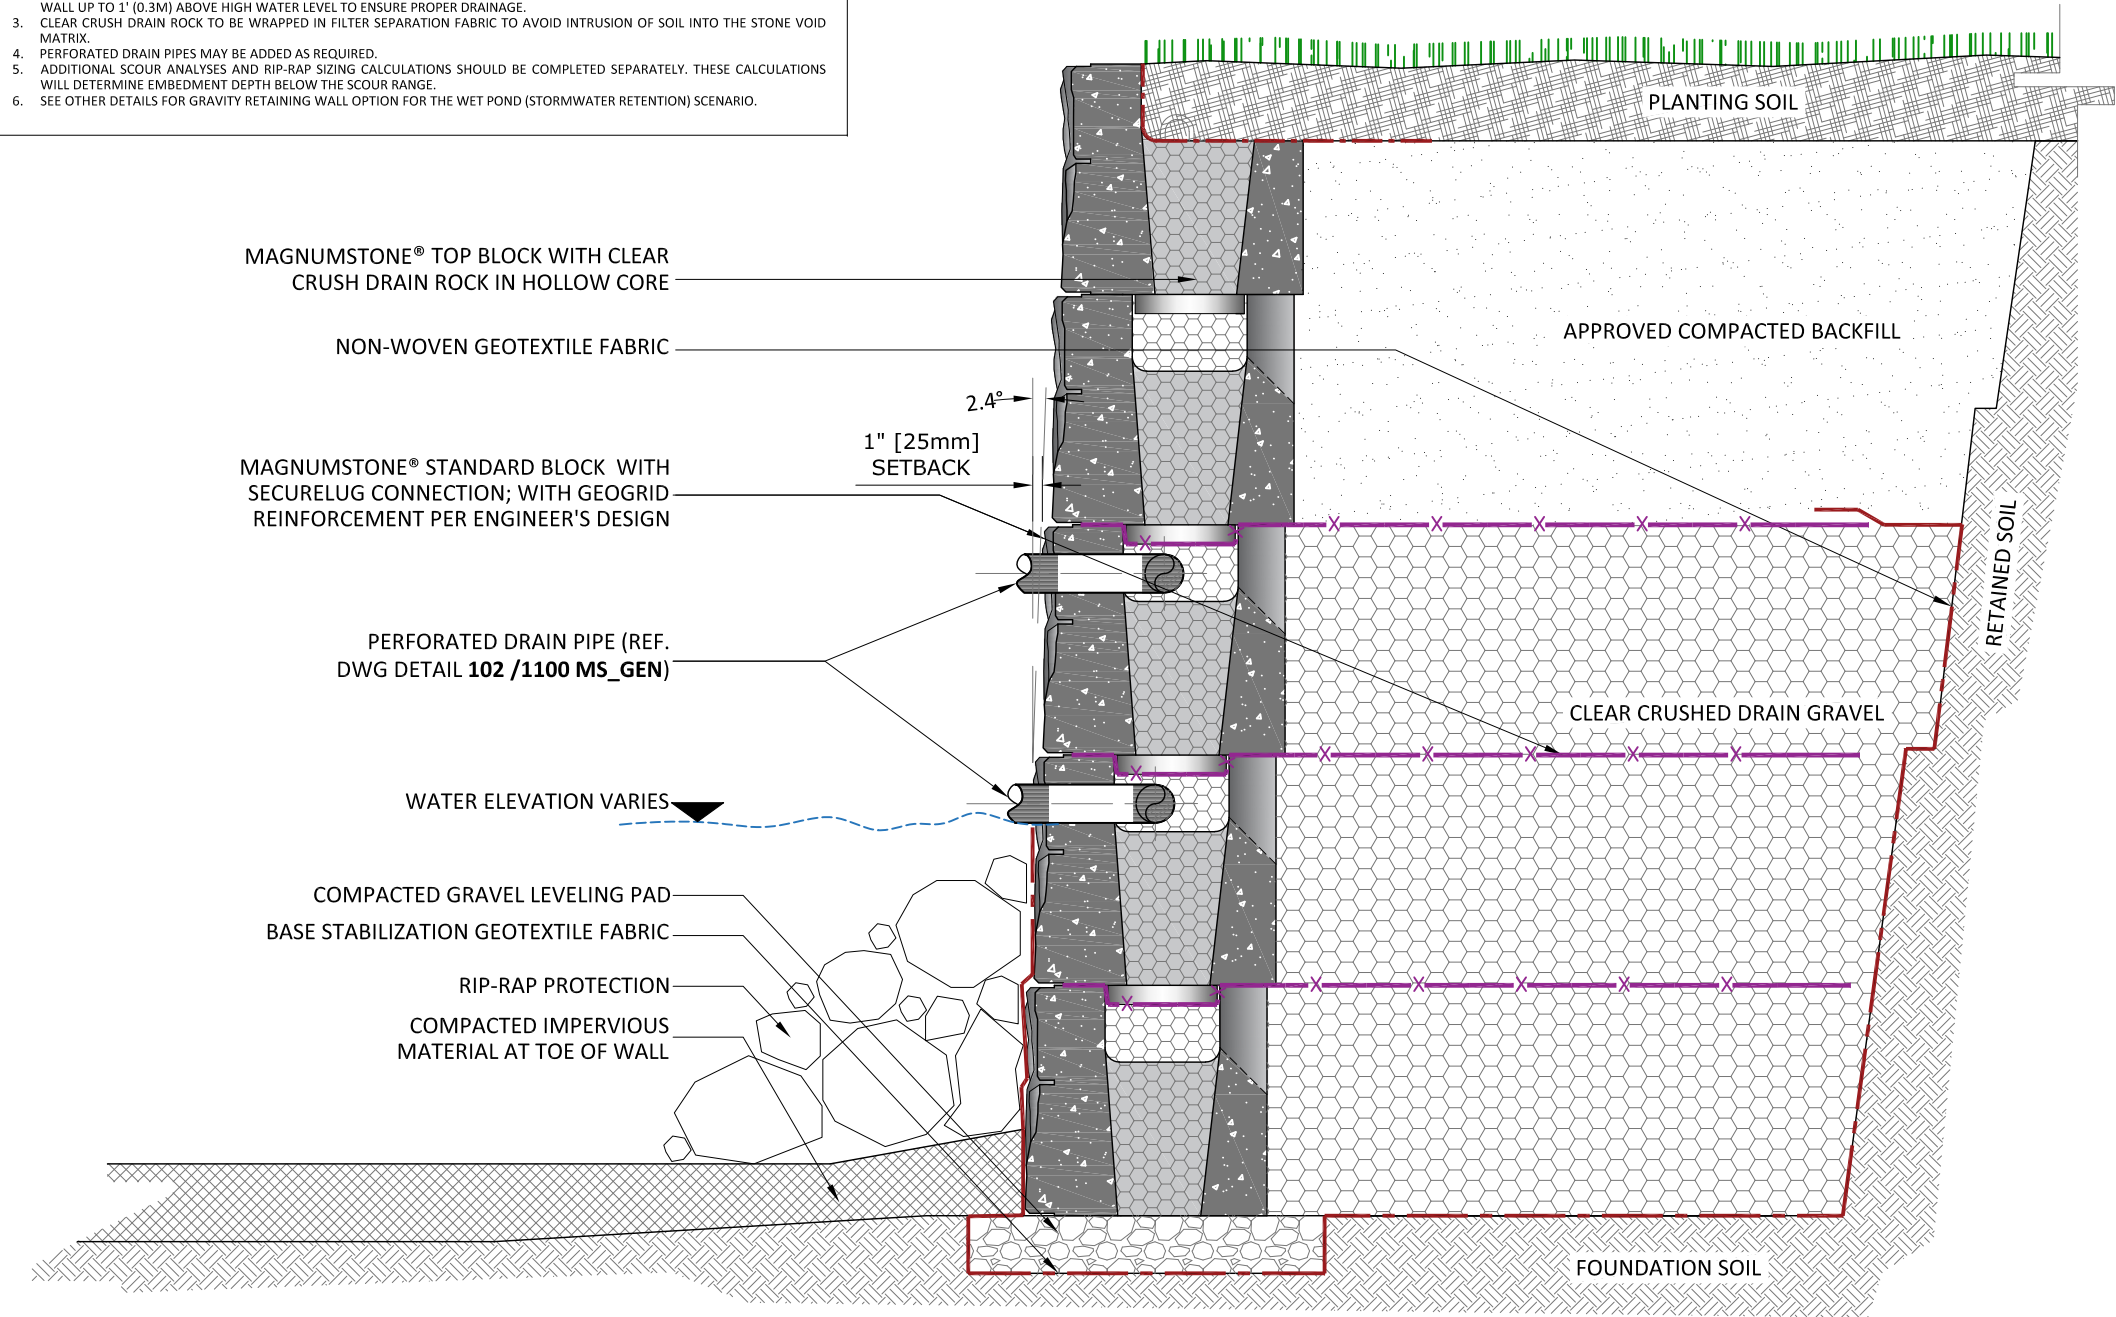

02

GEOGRID-RETENTION WET POND DETAILS

SCALE 1 : 20

GENERAL NOTES:

These drawings are intended solely to act as an aid when designing a wall. This drawing should not be used for final design or construction.

Each site-specific wall should be certified and signed by a registered geotechnical engineer in the State or Province that it is being built.

The accuracy and use of the details in this document are the sole responsibility of the user.

01	ADDENDUM INFORMATION	08-10-2023
00	INTERNAL APPROVAL	07-01-2023
Rev	DESCRIPTION	DATE

REMARKS:

PURPOSE OF ISSUE:

- ☐ INFORMATION
☐ REVIEW / APPROVAL
☐ PRODUCTION

SHEET CONTENT

MAGNUMSTONE
GEOGRID WALL
STORMWATER APPLICATIONS

RETENTION WET POND
CROSS SECTION DETAILS

SHEET REFERENCE

102

1113-MS-STM

DRAWING INFORMATION

SCALE : AS INDICATED
PAPER SIZE: 17" WD X 11" HT
PREPARED BY: RM

